




Document code	B17
Revision code	01
Revision date	20.11.2014
Publication date	22.07.2014
Page no	1

CATTLE ELEVATOR

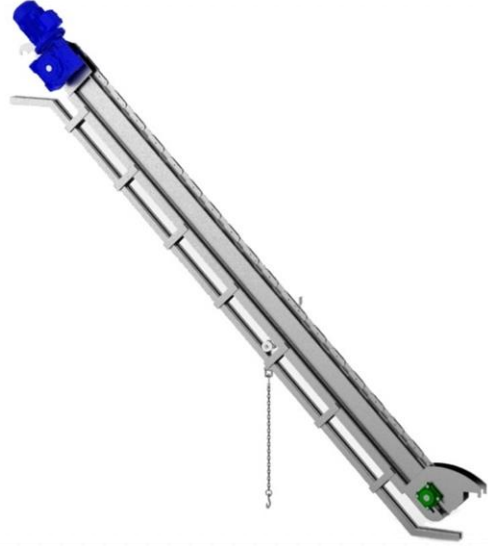

USAGE AREA: 1ST CLASS SLAUGHTER HOUSES

QUALITY: ST 37 , GALVANIZED BODY

PROPERTIES OF MACHINE

A-SUBJECT:

Providing cattle elevator for using in the slaughter hall of slaughter houses.

B- TECHNICAL PROPERTIES:

- Cattle elevator will be stainless twin rail.
- Sachet will be NPU profiled and fold points will not prevent the movement of the chain
- With the help of pushing boots on the cattle elevator at interval of 600 mm ¼ carcasses would be lifted to 5000mm with the angle of nearly 45 degree.
- After lifting that will continue on the elevation of twin rail, at least 5 mt.
- Cattle elevator is in the power of 10 HP and will be provoked with worm gear.
- Its speed will be approximately 10 mt /m.
- One of the chain wheel provide the movement with the help of other chain wheel in the engine reducer.
- Other wheel is stretch forming and will be mounted to the tail part of the sachet.
- Bedding of wheels to the sachets will be bearing.
- Aisle will be mounted to the twin rail on the drive section of the elevator and to the ground on the tail part
- Carcass will be hot-dip galvanized and wheels and chains will be electro-galvanized
- Quartering elevator will be mounted with whole equipment and panel and electric connections will be done and delivered in running.

C. GENERAL ISSUES

- Will be appropriate to the matters which is signified on Technical Properties.
- 2 years of warranty will be provided for cattle elevator.

