


	Document code	S19
	Revision code	01
	Revision date	20.11.2014
	Publication date	22.07.2014
ı	Page no	1

SPECIFICATION

LUNGS CONVEYOR

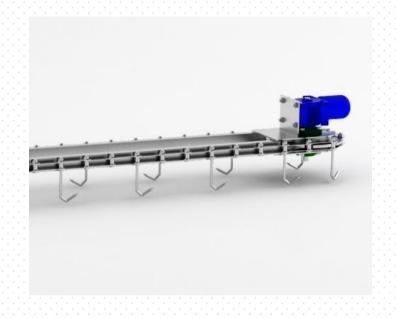

USAGE AREA: 1. CLASS SLAUGHTERHOUSES

QUALITY: ST 37, GALVANIZED BODY

PROPERTIES OF MACHINE

A. KONU

Used for purging offal of ovine and bovine in slaughterhouses.

B- TECHNICAL PROPERTIES:

- Main sachet of the lungs conveyor is produced by stainless chrome in size of 30x50x2 mm. Length of the conveyor is approximately 2 meters. (designed according to place)
- Consist of one trailing wheels and one drive wheel
- Chain locks will be laser-cut which is appropriate to gear and pitch will be at least 100 mm
- Consist of at least 17 lung hooks. These hooks will be in diameter of 12 mm and 304 quality stainless steel.
- Will be provoked by 1.1 kW reductor engine. Its speed will be 3 m/m

A. GENERAL ISSUES

- Will be appropriate to the matters which is signified on Technical Properties.
- 2 years of warranty will be provided for pressured lungs conveyor